
EXTERNAL DIMENSIONS:

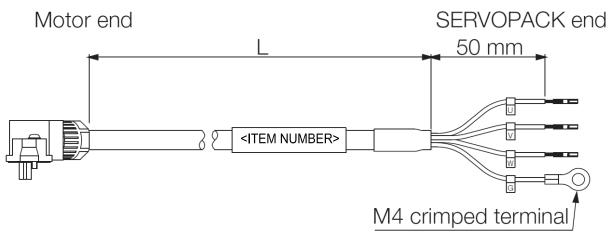

The recommended bend radius is 90mm or larger for moving parts of machines, such as robots.

The recommended bend radius is 15mm or larger for fixed installations.

MOTOR END CONNECTOR

MOTOR END CONNECTOR				
Item		Description		
Order Number		JZSP-C7M9-2-E		
Manufacturer		J.S.T. Mfg. Co., Ltd.		
User Instructions		JFA Connector J-2700		
Compo- Receptacle		J27S-06FMH-7KL-M-CF		
nents	Contacts	SJ2F-01GF-P1.0		
Applicable Wire Sizes		Power terminals: AWG20 Holding brake terminals: AWG20 to AWG24		
Applicable Cable Diameter		7 mm ±0.3 mm		
Outer Diameter of Insulating Sheath		1.11 mm to 1.53 mm		
Mounting	Screws	M2 pan-head screws		
Crimp-	Hand Tool	YRS-8861		
ing Tool*	Applicator	APLMK SJ2F/M01-10		
External Dimensions [mm]		Cable on Load Side 28.7 Pin 1 Pin 1 Pin 6 Pin 1 Pin 6		

RAW CABLE

Item	Flexible Cable		
Order Number*	JZSP-C7M29-□□-E (maximum length: 50 m)		
	UL2517 (rated temperature:105°C) AWG20 × 4C, AWG22 × 2C		
Specifications	Power lines: AWG20 (0.52 mm²) Outer diameter of insulating sheath: 1.37 mm		
	Holding brake lines: AWG22 (0.33 mm²) Outer diameter of insulating sheath: 1.37 mm		
Finished Diameter	7 mm ±0.3 mm		
Internal Structure and Lead Colors	(Green) Black (White) Black (Black)		

^{*} Replace the boxes ($\square\square$) in the order number with the cable length (05, 10, 15, 20, 30, 40, or 50).

WIRING SPECIFICATIONS

SERVOPA('K L pade	
SERVOER	ur Leaus	

SERVOPACK Leads			Servomotor Connecto	
Wire Color	Signal		Signal	Pin
Green/yellow	FG	FG		1
Blue	Phase W		Phase W	
White	Phase V		Phase V	3
Red	Phase U		Phase U	4
			_	5

ITEM NUMBER	L=Length
JZSP-C7M22F-03-E	3000
JZSP-C7M22F-05-E	5000
JZSP-C7M22F-10-E	10000
JZSP-C7M22F-15-E	15000
JZSP-C7M22F-20-E	20000
JZSP-C7M22F-30-E	30000
JZSP-C7M22F-40-E	40000
JZSP-C7M22F-50-E	50000

THIS DOCUMENT AND THE INFORMATION CONTAINED IN IT ARE PUBLIC AND CAN BE DISCLOSED WITHOUT EXPRESS WRITTEN CONSENT OF YASKAWA AMERICA INC. SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR ONGOING PRODUCT MODIFICATIONS AND IMPROVEMENTS.

YASKAWA

TITLE:SGM7J/7A-02 to -06. 200W to 600W Servomotor Power Cable, No Brake, Toward Load, Flexible, Non-Shielded

ITEM #:

JZSP-C7M22F-xx-E (xx = See Chart)

SIZE REVISION PAGE
- 0 1 of 1

SCALE: NTS UNITS: mm

mm SHEET: 1/1

CAD-JZSP-C7M22F-xx-E

 \ast A Crimping Tool is required. Contact the connector manufacturer for details.

REV	DESCRIPTION	DATE	DRAWN BY
0	Initial Release	12/20/2018	E. SONDERMAN