

C/C:	INPUT VOLTAGE (VAC)	WEIGHT Kg (lb)	COOLING FANS
GA50□	200 TO 240 1-PHASE	0.8 (1.8)	0

□ denotes A-Z

YASKAWA

UNITS MM [IN]
SCALE 1:2


DRWN.	J. MATTAS	5-28-19
CHKD.	J. PIOTROWSKI	7-29-19
TECH.	L. UDDIN	8-7-19
APRV.	J. CAIRO	8-22-19

TITLE	GA500 DIMENSION DRAWING
	FRAME SIZE 1.3
	IP20 ENCLOSURE


SIZE	A	PAGE	1 OF 3
DWG.NO.	DD.GA50.FR1.3.IP20		

REV
0

FRONT VIEW

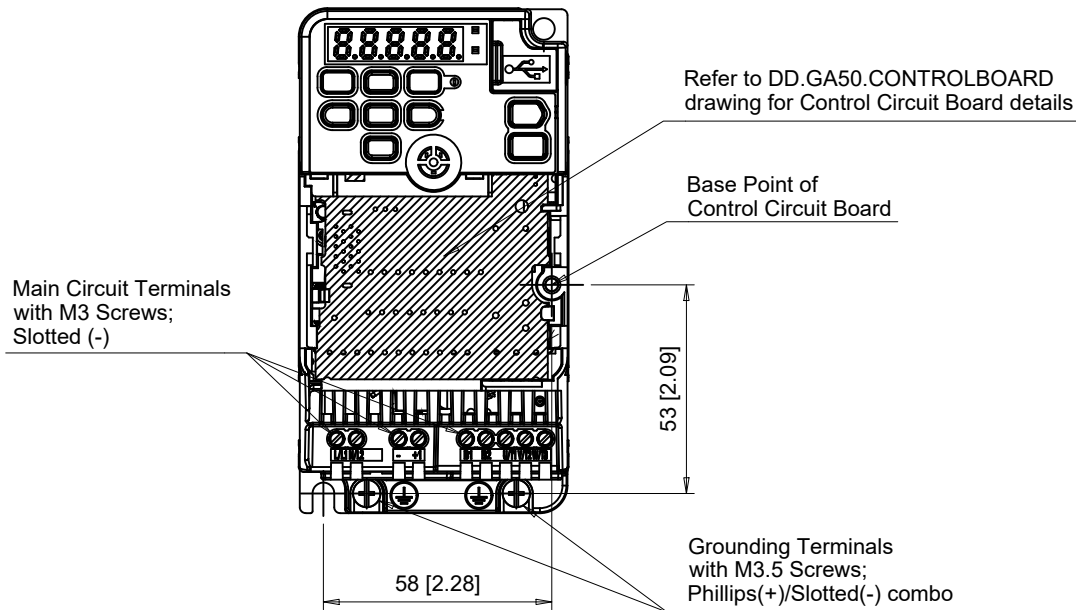

BOTTOM VIEW

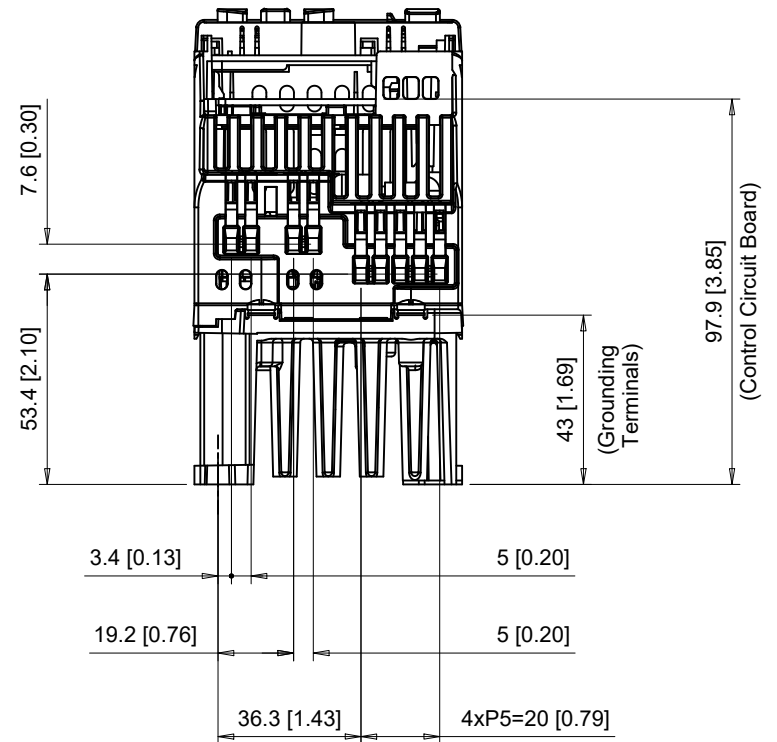

C/C: GA50□	TERMINAL SYMBOL	WIRE RANGE AWG (mm ²)	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
B004□□□	L/L1, N/L2	14 - 12 (2.5 - 4)	M3	0.6 - 0.8 (5 - 7)
	U/T1, V/T2, W/T3	14 - 12 (2.5 - 4)	M3	0.6 - 0.8 (5 - 7)
	-, +1	14 - 12 (2.5 - 4)	M3	0.6 - 0.8 (5 - 7)
	B1, B2	14 - 12 (2.5 - 4)	M3	0.6 - 0.8 (5 - 7)
	⊕	14 (2.5)	M3.5	0.8 - 1.0 (7 - 9)

□ Denotes A-Z

Note: Refer to applicable codes and standards for proper wire type and size.

YASKAWA

	DRWN.	J. MATTAS	5-28-19
UNITS MM [IN]	CHKD.	J. PIOTROWSKI	7-29-19
SCALE 1:2	TECH.	L. UDDIN	8-7-19
	APRV.	J. CAIRO	8-22-19


DRWN.	J. MATTAS	5-28-19
CHKD.	J. PIOTROWSKI	7-29-19
TECH.	L. UDDIN	8-7-19
APRV.	J. CAIRO	8-22-19

TITLE
GA500 DIMENSION DRAWING
FRAME SIZE 1.3
IP20 ENCLOSURE

SIZE A PAGE 2 OF 3
DWG.NO.
DD.GA50.FR1.3.IP20


REV
0

Minimum Installation Clearances
Scale 1:3

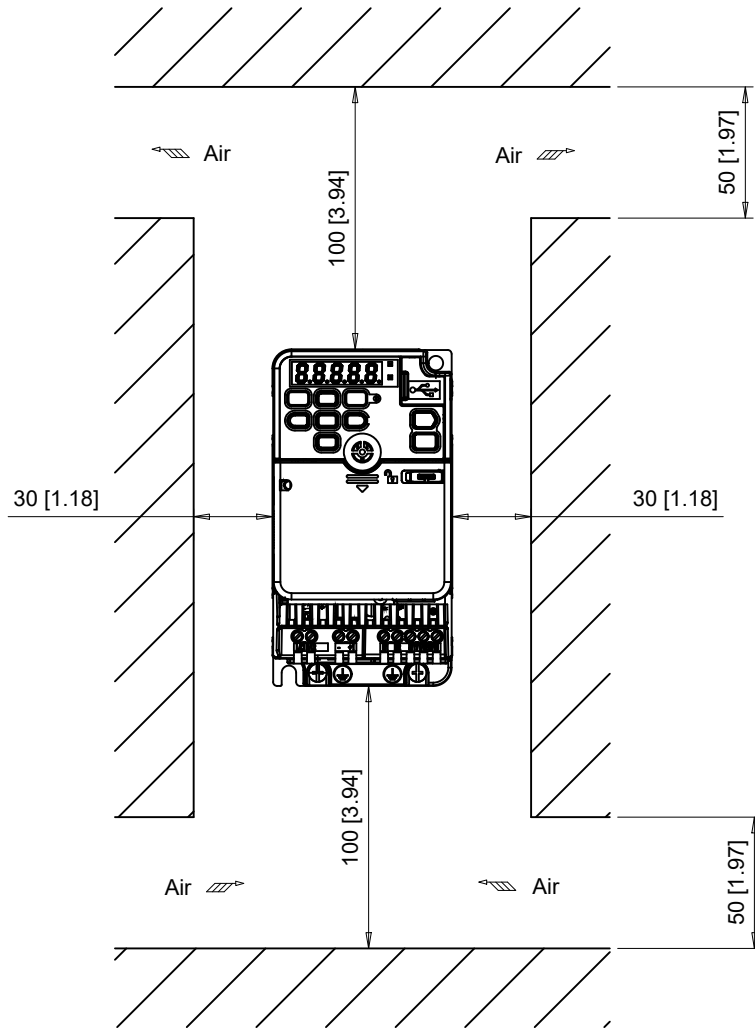

Note:
For alternate mounting configurations, consult manual.

Panel Cutout
For External Heatsink Mounting Configuration
Scale 1:2

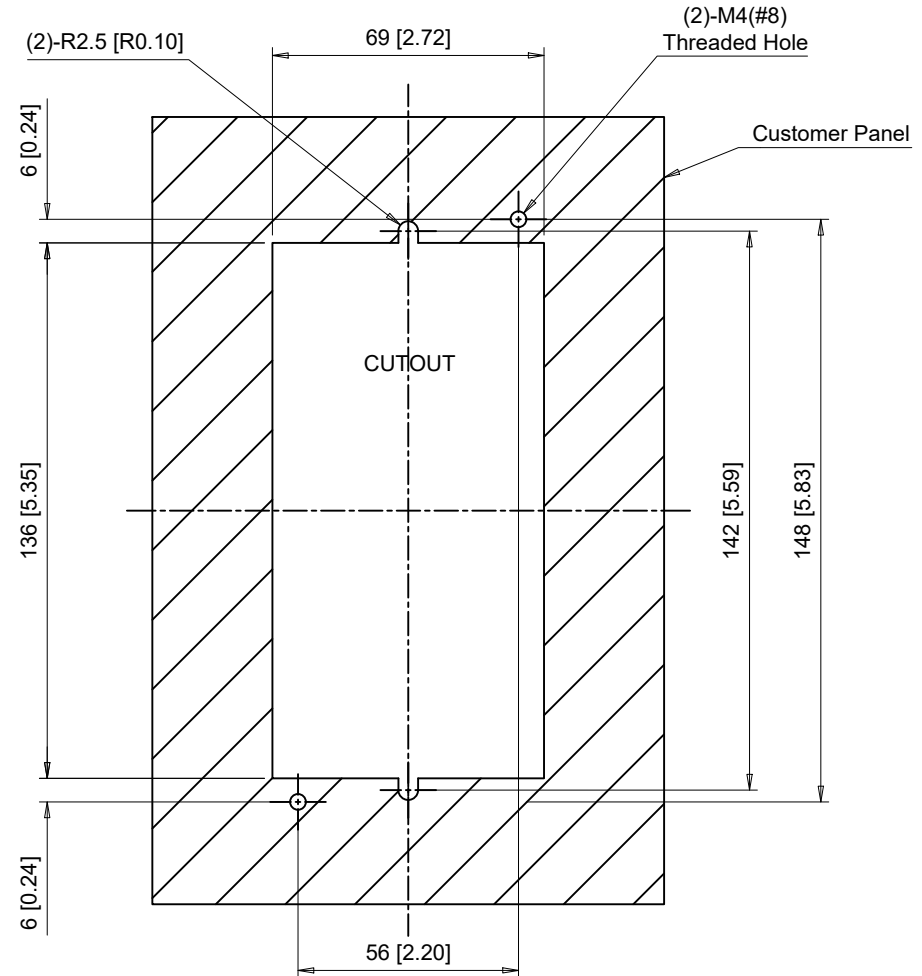

Notes:
Exposed heatsink minimum clearance = 43.5 [1.71].
Refer to external heatsink instructions document for additional details.

YASKAWA



UNITS MM [IN]
SCALE ABOVE

DRWN.	J. MATTAS	5-28-19
CHKD.	J. PIOTROWSKI	7-29-19
TECH.	L. UDDIN	8-7-19
APRV.	J. CAIRO	8-22-19

TITLE
GA500 DIMENSION DRAWING
FRAME SIZE 1.3
IP20 ENCLOSURE

SIZE A PAGE 3 OF 3
DWG.NO.
DD.GA50.FR1.3.IP20

REV
0