
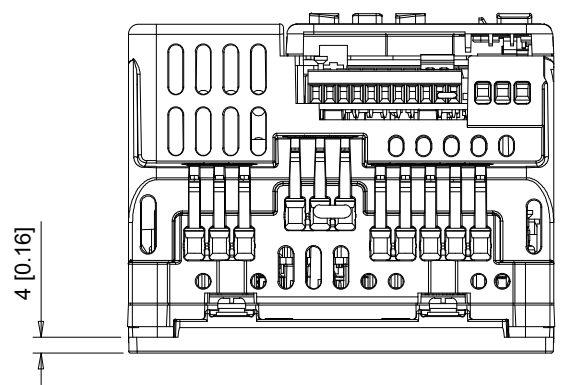
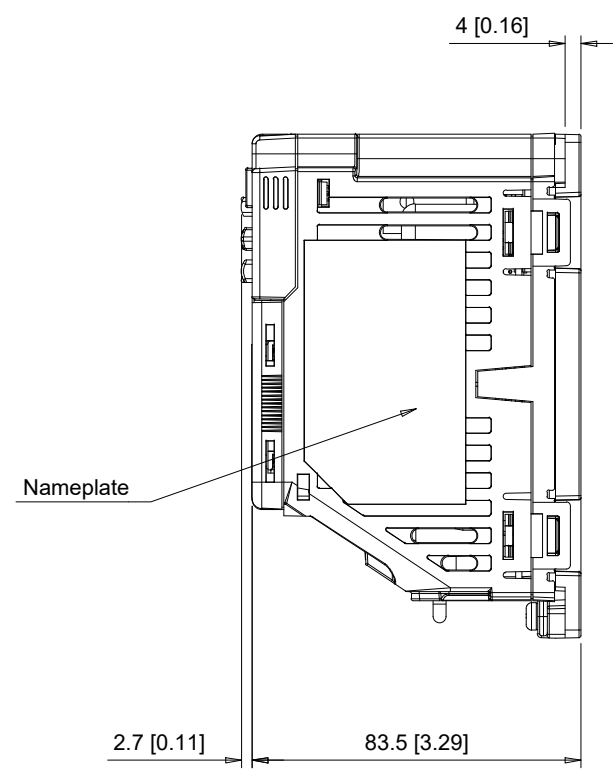


A B C D E F G H I J

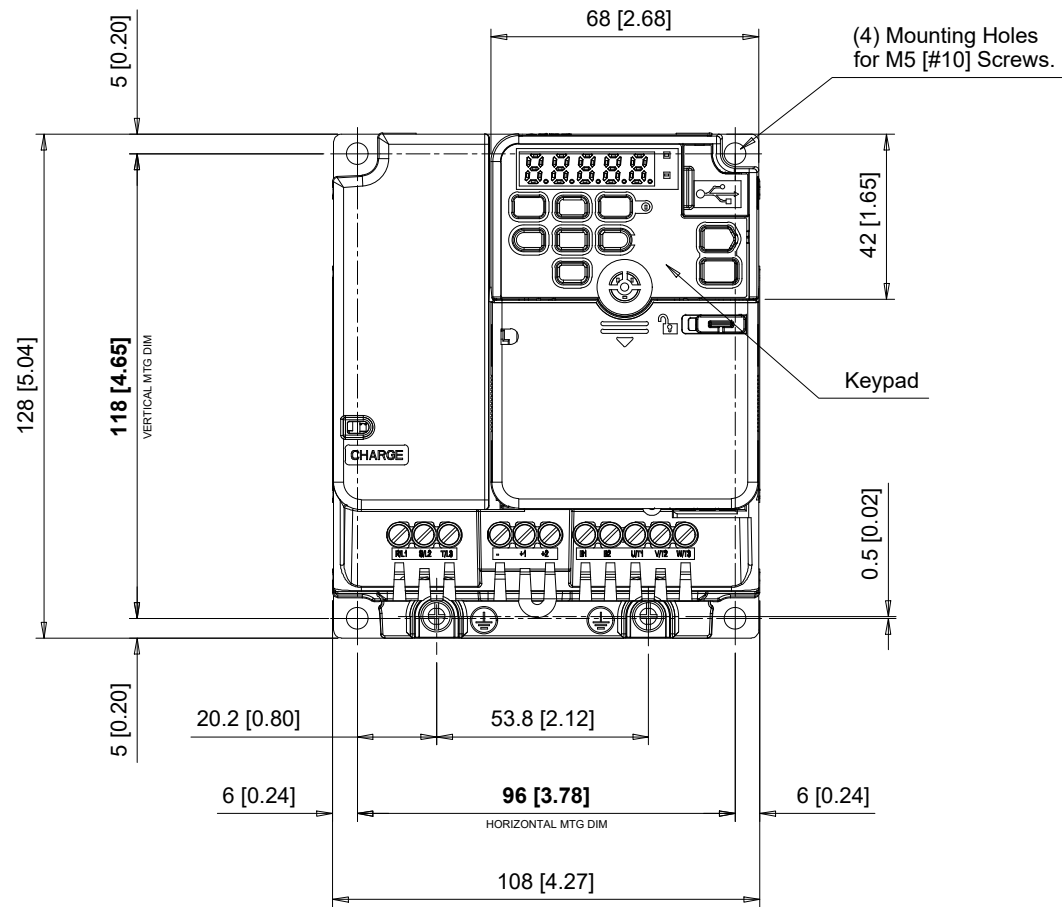

C/C:	INPUT VOLTAGE (VAC)	WEIGHT Kg (lb)
GA50□	380 TO 480 3-PHASE	0.9 (2.0)

□ denotes A-Z

YASKAWA

UNITS MM [IN]
SCALE 1:2

DRWN. J. MATTAS 7-20-21
 CHKD. J. PIOTROWSKI 7-21-21
 TECH. L. UDDIN 8-10-21
 APRV. J. CAIRO 8-17-21



TITLE
 GA500 DIMENSION DRAWING
 FRAME SIZE 2.4
 FINLESS HEATSINK

SIZE A PAGE 1 OF 3
 DWG.NO. DD.GA50.FR2.4.FNL

REV 0

FRONT VIEW

BOTTOM VIEW

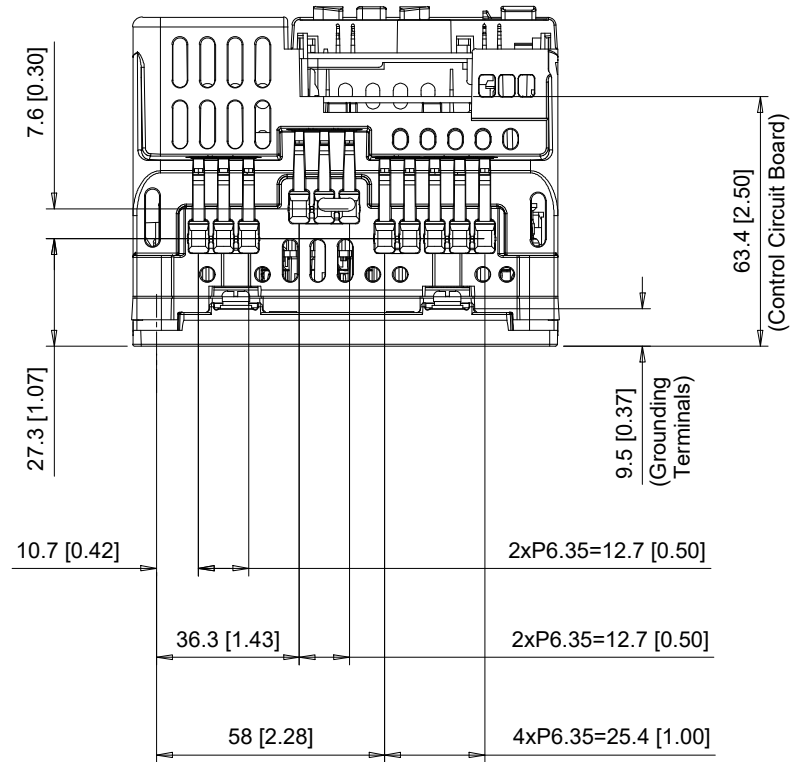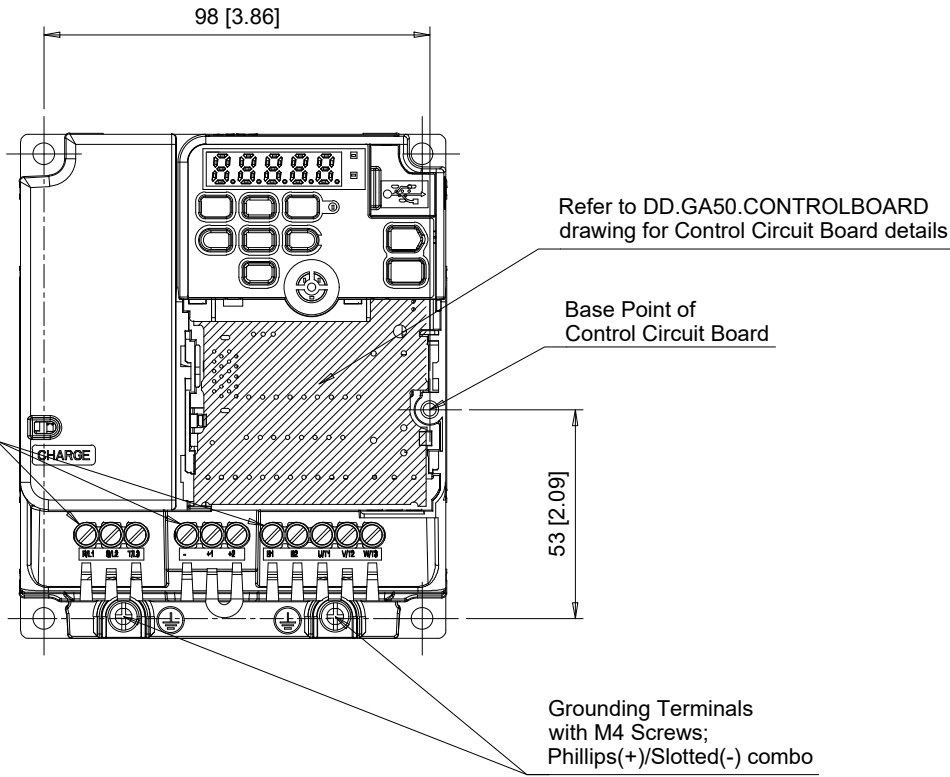

C/C: GA50□	TERMINAL SYMBOL	WIRE RANGE AWG (mm ²)	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
4004□□□	R/L1, S/L2, T/L3	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	U/T1, V/T2, W/T3	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	-, +1, +2	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	B1, B2	14 - 10 (2.5 - 6)	M3	0.6 - 0.8 (5 - 7)
	⊕	14 - 10 (2.5 - 6)	M4	1.2 - 1.5 (11 - 13)

□ Denotes A-Z

Note: Refer to applicable codes and standards for proper wire type and size.

YASKAWA

UNITS MM [IN]
SCALE 1:2


DRWN. J. MATTAS 7-20-21
CHKD. J. PIOTROWSKI 7-21-21
TECH. L. UDDIN 8-10-21
APRV. J. CAIRO 8-17-21

TITLE
GA500 DIMENSION DRAWING
FRAME SIZE 2.4
FINLESS HEATSINK

SIZE A
PAGE 2 OF 3
DWG.NO.
DD.GA50.FR2.4.FNL


REV
0

Minimum Installation Clearances

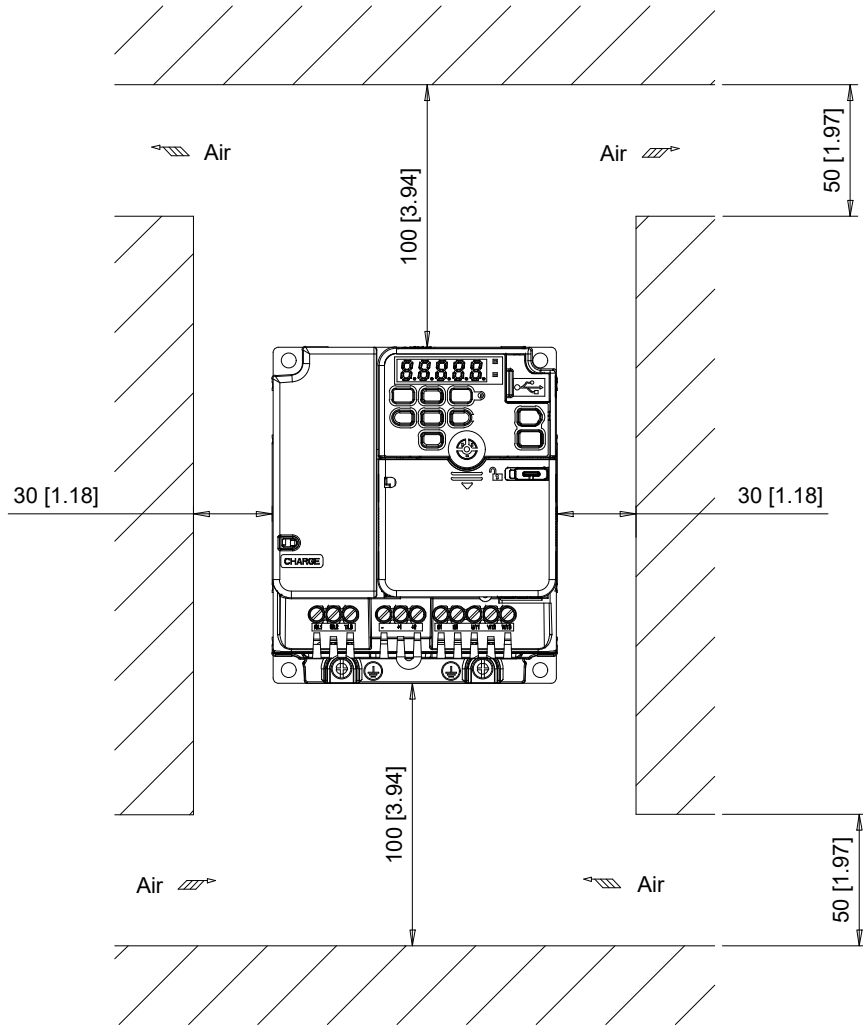

Note:
For alternate mounting configurations, consult manual.

Mounting Dimensions
Scale 1:2

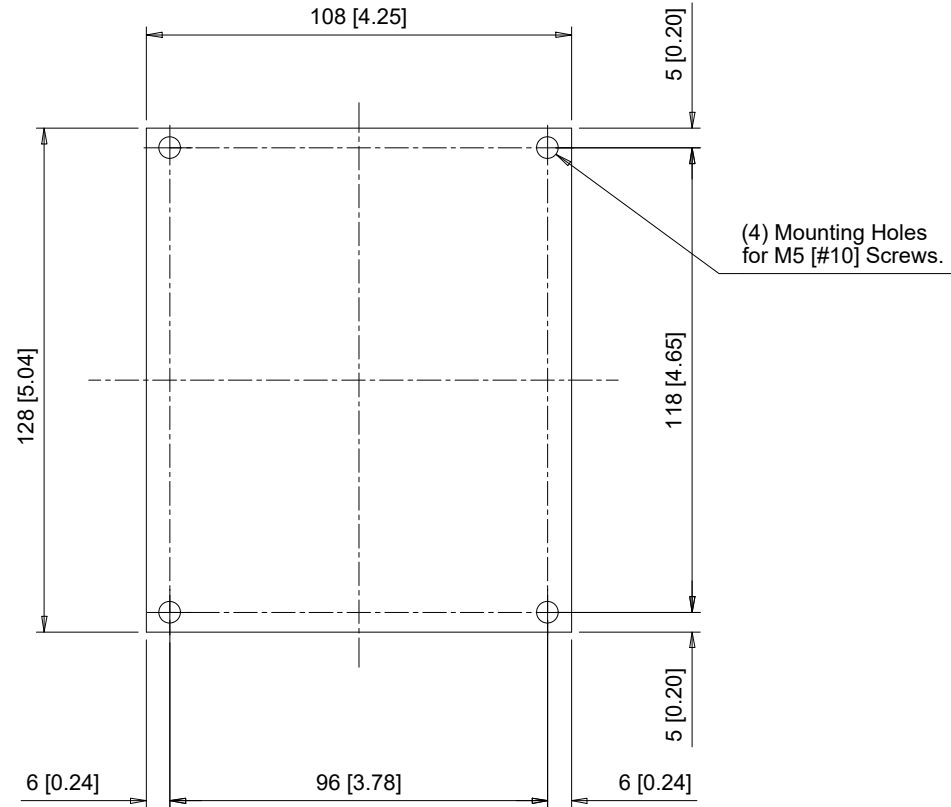

- Notes:
1. Mounting Plate Properties
 - Flatness shall not exceed 0.2mm
 - Roughness shall not exceed 25S
 - Temp. shall not exceed 90C (194F)
 2. Apply thermal compound between heatsink and mounting plate.
 3. Mounting Screw Torque
 - 2.0-2.5 Nm (17.7 - 22.1 lbf-in)
 4. See manual for complete details

YASKAWA

UNITS MM [IN]
SCALE 1:3

DRWN.	J. MATTAS	7-20-21
CHKD.	J. PIOTROWSKI	7-21-21
TECH.	L. UDDIN	8-10-21
APRV.	J. CAIRO	8-17-21

TITLE	GA500 DIMENSION DRAWING FRAME SIZE 2.4 FINLESS HEATSINK
-------	---

SIZE	A	PAGE	3 OF 3
DWG.NO.	DD.GA50.FR2.4.FNL		

REV	0
-----	---