

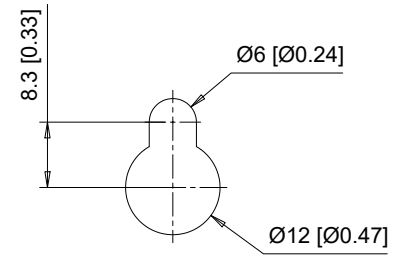


(4) Mounting Holes for M5 [#10] Screws. See Detail A for top mounting hole dimensions.

Center of Gravity  
Note: Dimensions shown are measured from the bottom left mounting hole

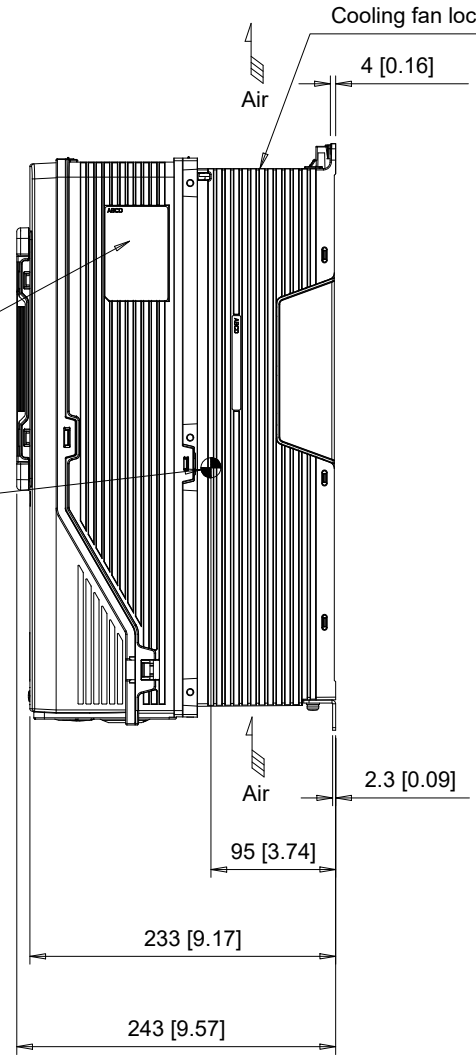

**Detail A**  
Top mounting hole dimensions  
Scale 1:1


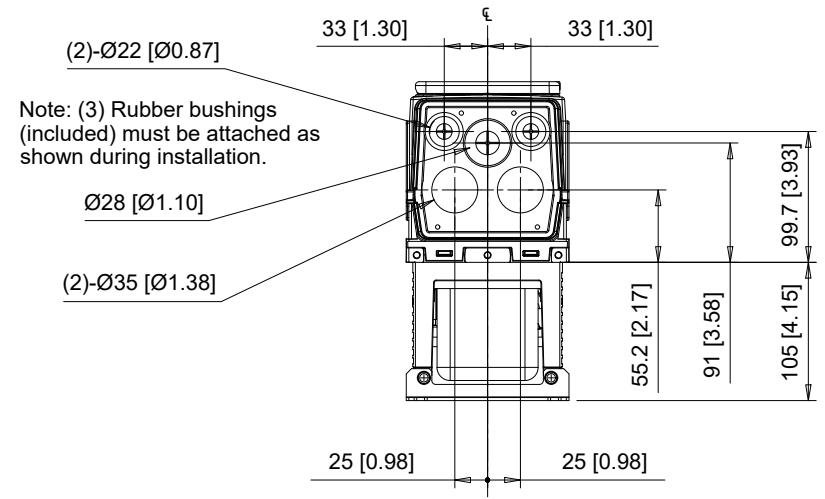


Note: (3) Rubber bushings (included) must be attached as shown during installation.

C/C: HV60□	INPUT VOLTAGE 3-PHASE (VAC)	WEIGHT Kg (lb)	COOLING FANS
2024□□□	200 TO 240	8.5 (18.7)	1
2031□□□		9.0 (19.8)	1
4021□□□	380 TO 480	9.0 (19.8)	1
4027□□□		10.0 (22.0)	1
4034□□□		11.0 (24.3)	1

□ denotes A-Z

A B C D E F G H I J

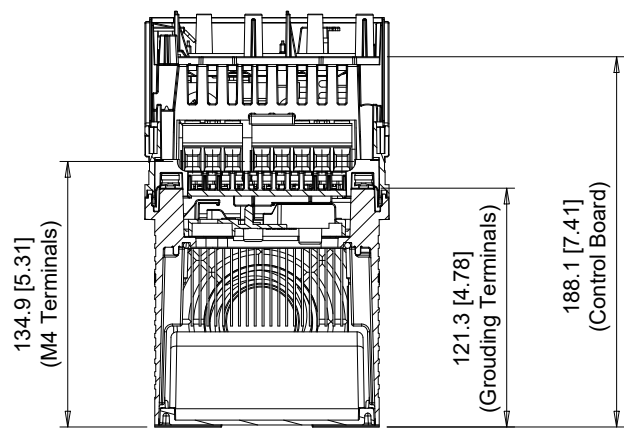
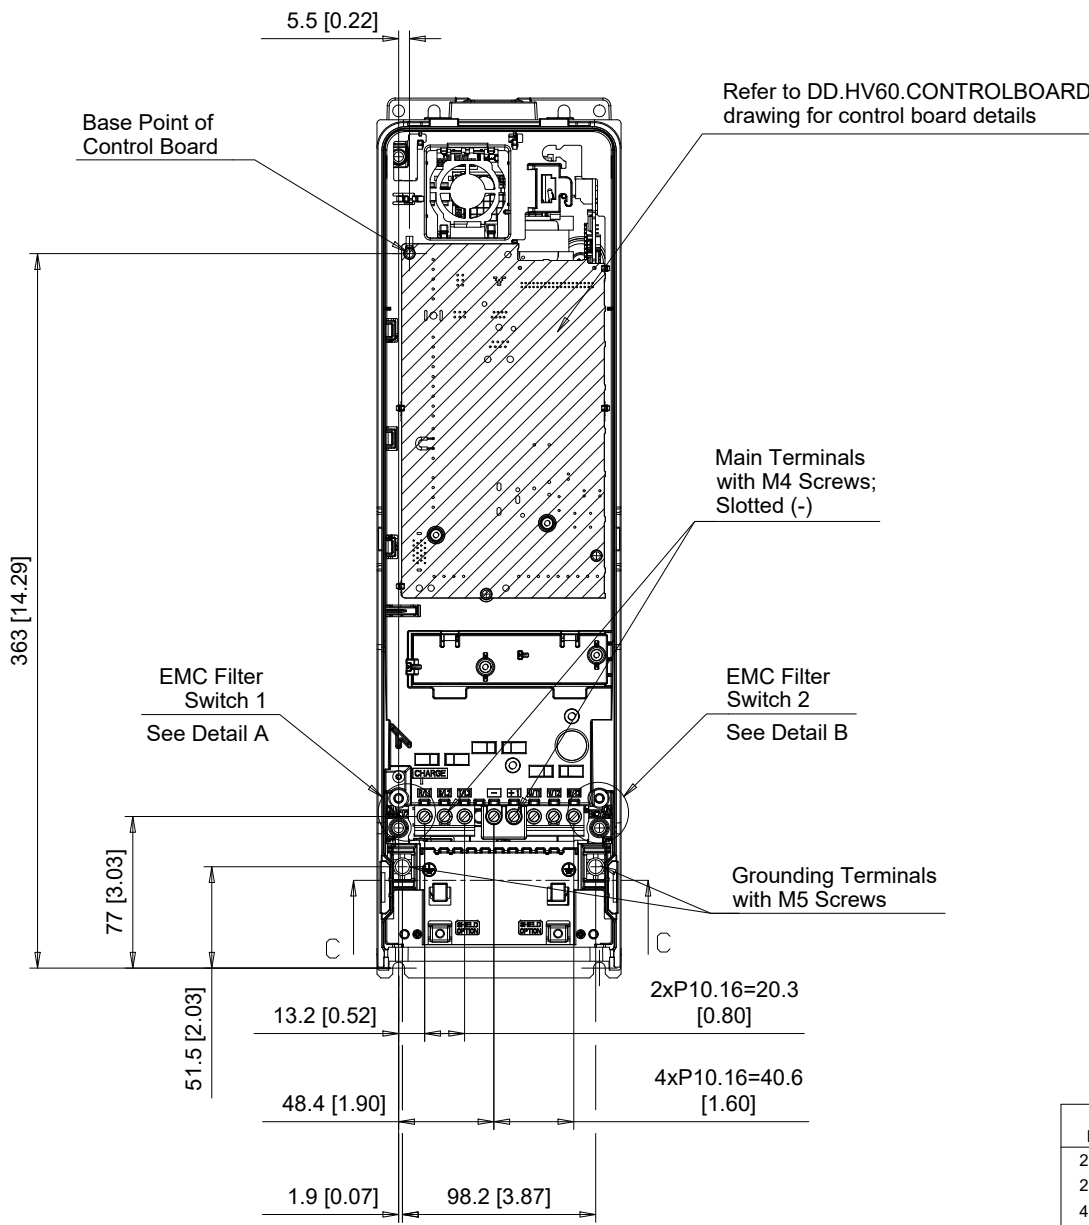


Section C-C

EMC FILTER SWITCHES

EMC SW1

EMC SW2



Detail A  
Scale 1:2

Detail B  
Scale 1:2

C/C: HV60□	TERMINAL SYMBOL	WIRE RANGE AWG (mm <sup>2</sup> )	TERMINAL SCREW	CLAMPING TORQUE N.m. (lb.in.)
2024□□□	R/L1, S/L2, T/L3	14 - 6 (2.5 - 16)	M4	1.7 (15)
2031□□□	U/T1, V/T2, W/T3	14 - 6 (2.5 - 16)	M4	1.7 (15)
4021□□□	-, +1	14 - 6 (2.5 - 16)	M4	1.7 (15)
4027□□□	⊕	14 - 8 (2.5 - 10)	M5	2.0 - 2.5 (18 - 22)
4034□□□				

□ Denotes A-Z

Note: Refer to applicable codes and standards for proper wire type and size.

**YASKAWA**

UNITS MM [IN]  
SCALE 1:4


DRWN. J. MATTAS 10-2-19  
CHKD. J. PIOTROWSKI 10-18-19  
TECH. L. UDDIN 10-21-19  
APRV. J. CAIRO 10-22-19

TITLE  
HV600 DIMENSION DRAWING  
FRAME SIZE 2  
IP55/UL TYPE 12 ENCLOSURE

SIZE A PAGE 2 OF 3  
DWG.NO. DD.HV60.FR2.T12

REV 0

Minimum Installation Clearances

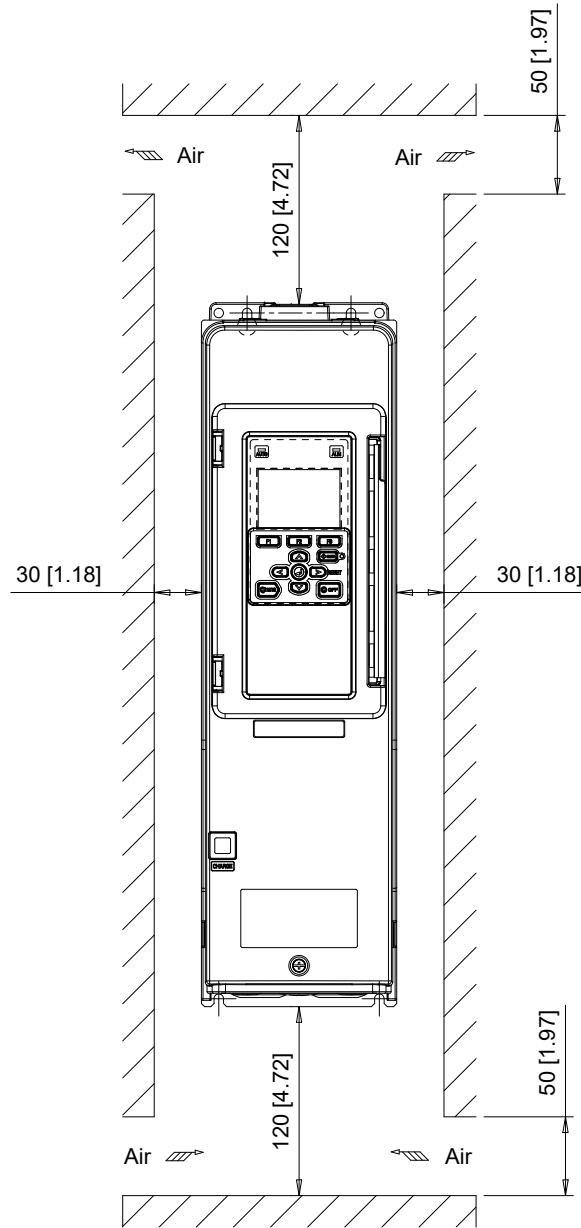

Note:  
For alternate mounting configurations, consult manual.

**YASKAWA**

UNITS MM [IN]  
SCALE 1:5

DRWN.	J. MATTAS	10-2-19
CHKD.	J. PIOTROWSKI	10-18-19
TECH.	L. UDDIN	10-21-19
APRV.	J. CAIRO	10-22-19

TITLE  
HV600 DIMENSION DRAWING  
FRAME SIZE 2  
IP55/UL TYPE 12 ENCLOSURE

SIZE A PAGE 3 OF 3  
DWG.NO. DD.HV60.FR2.T12

REV  
0